


Fixed Length Cable Lanyard

ANC15.1000 - 1000mm

ANC15.2000 - 2000mm

ANC15.3000 - 3000mm

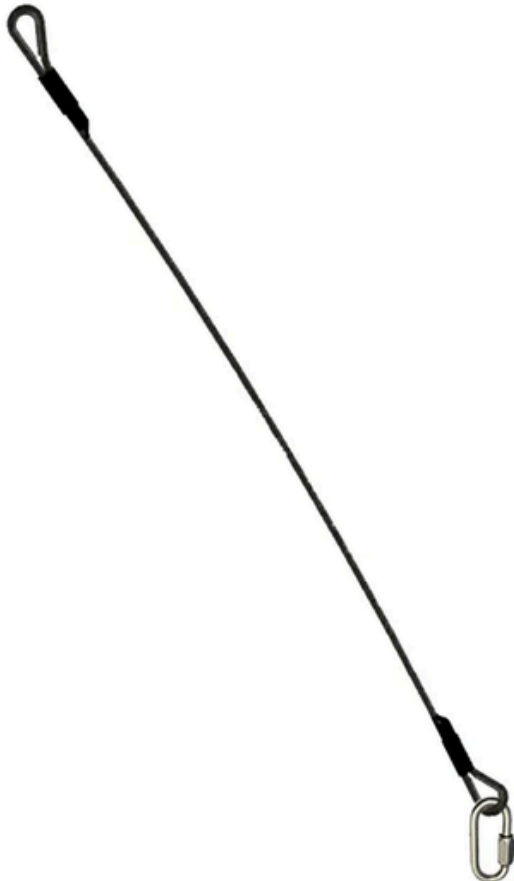

Fixed Length Cable Lanyard

Applications

- Provides fall protection at the point of entry to roof area for access by maintenance personnel
- Eliminates pendulum effect ensuring minimal lanyard slack at critical entry point to the roof

Advantages

- Fall arrest rated – 15kN
- Can be custom made to suit a specific length/application
- Minimises penetrations into roof deck
- Non-corrosive stainless steel cable
- PVC coated stainless steel cable and end terminals
- Batch number identification with internal tracer ribbon
- Includes fall arrest rated quicklink
- Designed and manufactured In Australia

Technical Data

Material

- Anchor strop – PVC coated stainless steel (6mm cable)
- Eyelets – PVC coated stainless steel

Dimensions

- Strop eyelet diameter – 22mm
- Quicklink – 8mm screw gate type (18mm gate opening)
- Strop lengths – 1000, 1500, 2000, 3000mm (eye to eye)

Ratings

- Fall arrest only – 15kN

Compliance

The AN115 Anchor Point Strop with Quicklink is designed and manufactured in accordance with requirements of Australian Standards AS/NZS 1891.4:2009.

Testing

Dynamic load test – 15kN

Warranty

3 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations.

Inspection & Maintenance

This device requires periodic inspection and maintenance by a qualified safety inspector.

Important Note

Not to be used for rope access.

Technical Support

Hart Australia
1300 794 046
customercare@hart.au
www.hart.au