


Roof Mount Plant Platform

PLT.L - low profile

PLT.H - high clearance

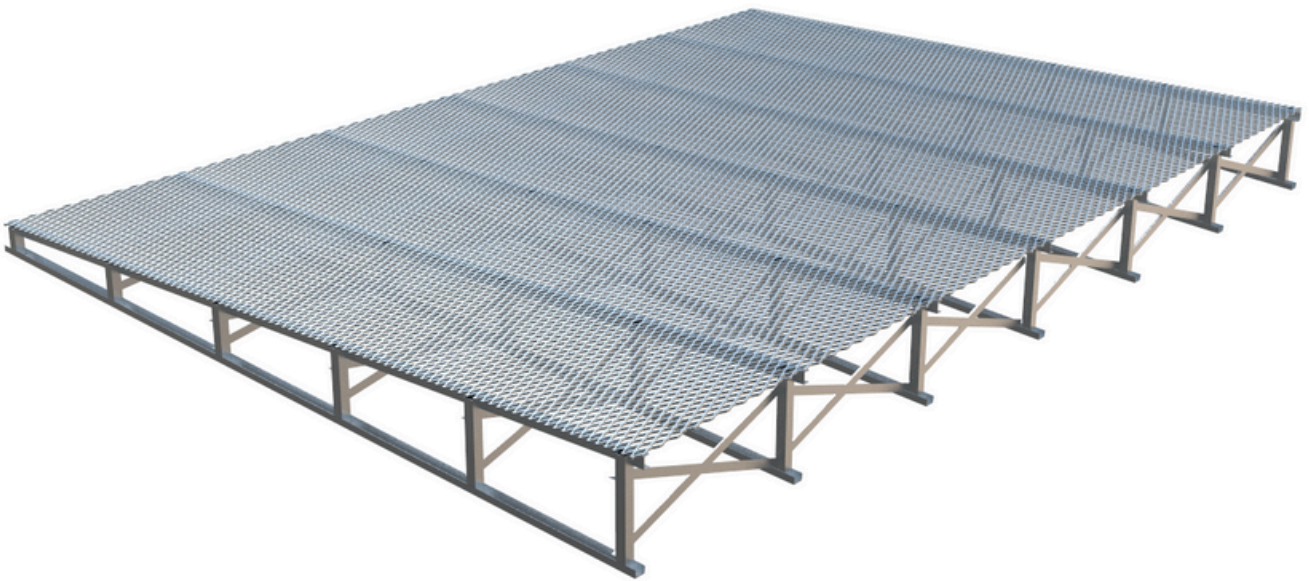

Applications & Advantages

- Safe, easy access to roof-mounted equipment for maintenance personnel.
- Cost-effective, easy installation on new builds.
- Simple integration in retro fit situations for new builds.
- Custom-engineered to suit your needs.
- High clearance option allows more equipment underneath deck.
- High strength to weight ratio minimises dead loads and reduces costs through minimised sub-structure.

Material

High grade T6 Australian structural aluminium

Compliance

Complies with AS/NZS1170 series, AS1657 and AS/NSZ1664.1. Earthquake rated to comply with AS/NZS1170.4

Warranty

25 years

Inspections & Maintenance

Regular inspections are recommended to ensure the integrity of the platform is upheld.

Loadings

Engineered to live load rating of 2.5kPa or greater in accordance with AS/NSZ1170.1. Designed for wind loads according to AS/NZS1170.2 and seismic loads according to AS/NSZ1170.4.

Weight

Skeletal and mesh platforms weigh up to 85% less than alternative structural steel systems.

Perimeter Options

Guardrails, screens or acoustic screens.