


EWP Access Kit

GRW.EWP

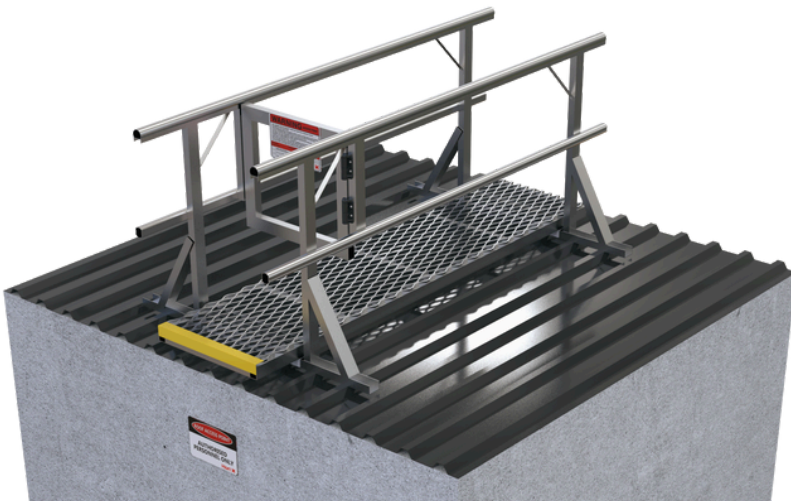

EWP Access Kit

Applications

- Ideally suited to provide safe and easy access to roofs via an EWP
- Ensures safe access to roof mounted equipment when a portable ladder and ladder bracket is not a safe option

Advantages

- Lightweight, strong aluminium components ensure simple installation
- Safe access to the roofs of buildings via an EWP
- Multidirectional, non-slip surface tested to meet Australian Standards slip rating
- Non-corrosive materials provide maintenance free protection
- Includes self-closing gate for maximum safety at roof edge
- Low profile, unobtrusive and easily powder coated
- Designed and manufactured in Australia

Technical Data

Material

- All componentry and accessories manufactured from high grade structural aluminium with options for powder coating.

Dimensions

- Landing –
Distance between guardrail – 560mm
Length – 2400mm or 3000mm
Height adjustable to 300mm
- Guardrail – 1000mm above landing
- Kneerail – 450mm below guardrail
- Post spacing – max 2.0m

Fixings

- Battens fixed to roof with 6mm Bulbtite rivets and EPDM seals

Rating

- Fall arrest use: 15kN
- User weight limit: 120kg (user and equipment)
- Can be used as a rope access anchorage in the event of an emergency rescue only.

Compliance

Hart's EWP Access Kit is designed to conform with requirements of Australian Standards AS1657:2018 and relevant statutory WHS Codes of Practice/Guidelines.

Testing

Testing and performance based on requirements of Australian Standards AS1657:2018.

Warranty

10 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations.

Inspection & Maintenance

Visual inspection for any damage or loose fixings must be done periodically and prior to use. No certified maintenance is required. Basic wear and tear preventative maintenance is recommended, as per manufacturer's specifications and recommendations.

Important Note

Failure to supply and/or install proprietary product in accordance with above standards and codes, specifications and instructions voids complete system certification and/or warranty.

Technical Support

Hart Australia
1300 794 046
customer@hart.au
www.hart.au